


The Funke Active Splitter enables you to link up to 4 independent TV sets (or recorders) to one antenna. To guarantee the best possible quality, the signal is actively amplified. The durability and quality make the Funke Active Splitter a modern and reliable TV partner for you!

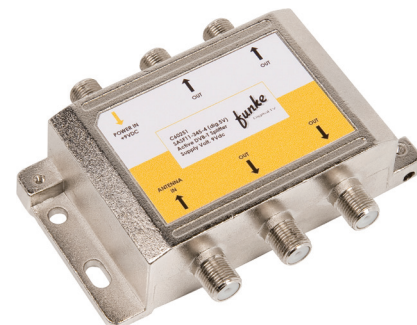

General specifications

Funke art. nr.	490.602501
Amplifier principle	two stage amplifier
RF Connection	F-connector
Power Connection	5,5 mm DC connector

Technical specifications

Input impedance	75 Ω
Output impedance	75 Ω
Number of outputs	4
Frequency range	174 – 862 MHz
Signal gain	12 dB
Noise	3,0 dB typ.
Input voltage	9 VDC
Input current	60 mA max. (build-in amplifier + antenna)
Output voltage to Antenna	5 VDC



Physical specifications

Dimensions Splitter (l x w x h)	67 x 29 x 34 mm
Weight Splitter	0,175 kg
Colour	Silver
Dimensions Package (l x w x h)	65 x 140 x 166 mm
Weight Package	0,250 kg
Outer Carton	40
Pallet	1000

Contents

SASF11-345-4
Installation Set
User Manual

Clearly the Best

