


IP receiver to ASI-TS output

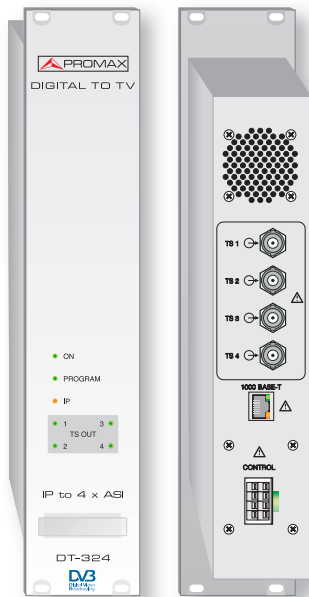

The **DT-324** is a IP packet converter to ASI-TS. It extracts information from an Ethernet network and processes and delivers it up to 4 TS-ASI outputs.

The 100/1000 Mbps input must be connected to an IP network carrying MPEG-2 transport stream packets.

The module extracts the IP streams from four Transport Streams corresponding to four DVB-ASI outputs available.


It is configured and controlled by means of the control module **DT-800**.

Specifications	DT-324
IP input Type Connector	1 Ethernet Input 100/1000 Mbps. RJ45
TS Output Type Connector	4 x DVB-ASI. BNC Female, 75 Ω
IP Streams Communication protocol Transmission methode Payload	UDP or RTP/UDP. MULTICAST / IGMP Version 2. From 1 to 7 packets MPEG-2.
Configuration	Through the DT-800 Control Module in local (keypad) or remote mode (PC). See DT-800
Power supply Connector Voltage and highest Consumption	Via the DT-800 Control and Power Module JST B08P-XL-HDS (Connecting Cable supplied with the DT-800) +12 V <0.2 A; +5 V <1.7 A.
Operating environmental conditions Altitude Temperature range Max. Relative humidity	Up to 2000 m. From 5 °C to 40 °C 80 % (up to 31 °C), decreasing lineally up to 20 % at 50 °C.
Mechanical features Dimensions Weight Mounting	50 mm (W.) x 262 (H.) x 230 mm (D.) 0.820 kg Using DT-900 rack/wall mounting frame
Included accessories 4 x CC024 4 x CC027 1 x 0 DG0064	Cable BNC/BNC 25 cm. Cable BNC/BNC 50 cm. User manual.

IP receiver to ASI-TS output

Options Configuration 61 Configuration 63	In this configuration are caught up to 4 TS that contains MPTS (<i>Multiple Program Transport Stream</i>) and are extracted directly from each one of the ASI outputs It includes 4 multiplexers inside the module. Each one combines 4 SPTS into a single MPTS. It allows 16 input channels, all them SPTS, which are multiplexed into 4 MPTS which are released at the ASI outputs.
Minimal configuration needed 1x DT-800 1x Mounting structure	Power and Control Module Rack and wall mounting structure (DT-900) or Rack mounting structure (DT-900B)

Functional scheme - Configuration 61

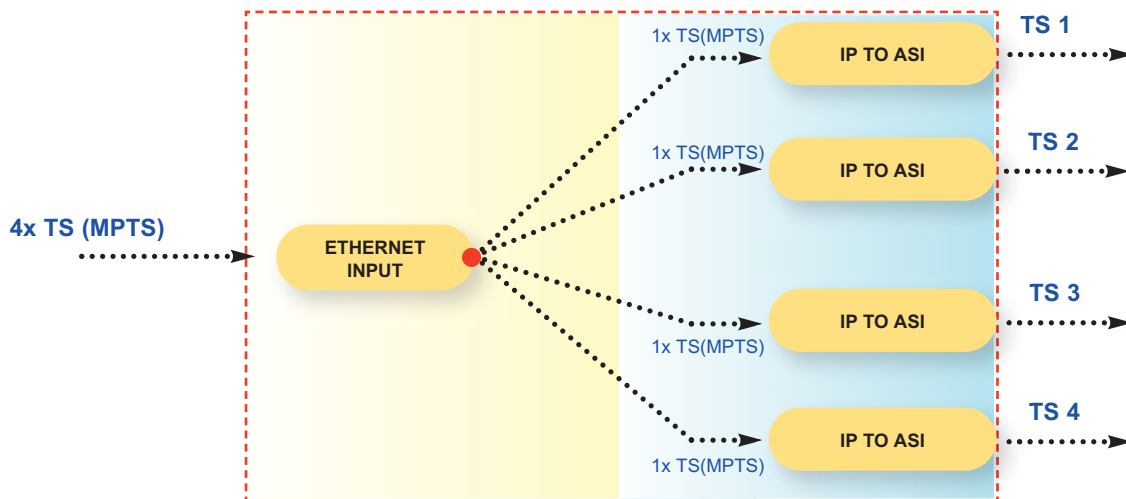

Functional scheme - Configuration 63

